

Window handle 111FGA.1K

lockable, for windows with tilt-first function, Design 111 made of polyamide, 20 mm diameter, 130 mm long, with 90 degree latching points and 7 mm square spindle, length protrudes by 30 mm (other lengths and 45 degree latching on request). The window handle meets the standards of DIN 18040.

Rose with metal base, 76.5 x 35 mm, with pivot diameter 10 mm, concealed screw fixing, screw hole spacing 43 mm, cover cap made of stainless steel (1.4301), wall thickness 1.5 mm. Rose with metal base, 75 x 33 mm, with pivot diameter 10 mm, concealed screw fixing, screw hole spacing 43 mm, cover cap made of stainless steel (1.4301), wall thickness 1.5 mm. Integrated pushlock with 5 pin tumblers, lockable in all latched positions, however, release of a 90 degree rotational movement, for opening the window when the window handle is locked, the locking acts directly on the handle and blocks rotation of the handle.


keyed to differ:

every lock cylinder requires a separate key, 2 keys are supplied with each handle.


keyed alike:

all lock cylinders can be locked with the same key.

Dimensions in mm

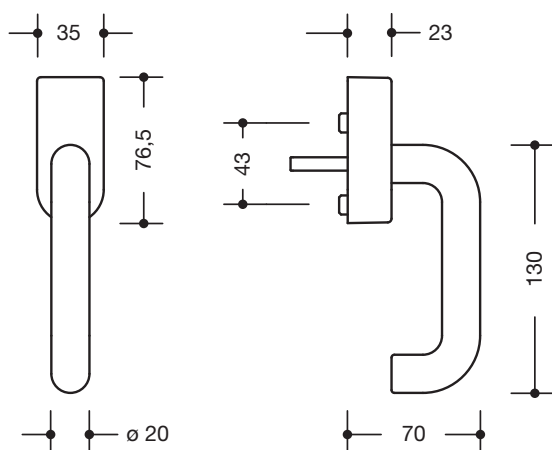

Colours



Polyamide

Alternative colours



Polyamide, mat

Technical information subject to alteration, 23rd August 2019

HEWI Heinrich Wilke GmbH
Postfach 1260
D-34442 Bad Arolsen

Telefon: +49 5691 82-366
Telefax: +49 5691 82-99366
international@hewi.com
www.hewi.com

HEWI (UK) Limited
Holm Oak Barn, Beluncle Halt
Stoke Road
Hoo Kent ME3 9NT

Phone +44 1634 258 200
Fax +44 1634 250 099
info@hewi.co.uk
www.hewi.com