

Vacant/engaged fitting 111PCIX02230

Flat roses according to DIN 18255 and EN 1906 and inlay made of coloured polyamide, consisting of:
Lever handle design 111.23P... in U-shape made of polyamide, with continuous steel core up to the end of the lever handle, through-dyed, 23 mm diameter, with stepped shoulder guide and latching groove, with grub screw M5, for additional fixing of the door lever handle on the square spindle, for optimal transfer of force to door leaf. the lever handle meets the standards of DIN 18040.

Flat lever rose and rose with turn knob, 306.23XI..., round, diameter 52 mm, 4.0 mm high. Concealed, non-loosening connection: Fixed rotating bearing of the lever handle and the roses, and in the door leaf dipping support pin. Easy and fast assembly, by snapping in pre-assembled assemblies. Toilet version with emergency opening by means of coin and optionally with or without occupancy disc (red/green indicator) on the outside. Rose material made of stainless steel (1.4301) matt or polished,

rose inserts made of polyamide high-gloss

Designed and tested for the projects segment, user category to EN 1906 - Class 4

Durability: Class 7

Door weight: No classification specified

Fire resistance: Class 0

Safety: Class 0



Corrosion resistance: Class 4

Burglary protection: Class 0

Type of operation: U



Dimensions in mm

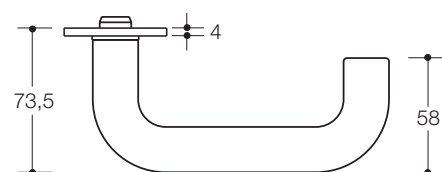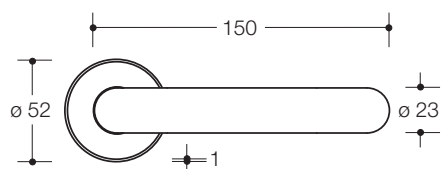

Colours



Lever handle and rose inlays (individually selectable)

Roses stainless steel (mat or polished)



Stainless steel

Technical information subject to alteration, 15th August 2019

HEWI Heinrich Wilke GmbH
Postfach 1260
D-34442 Bad Arolsen

Telefon: +49 5691 82-366
Telefax: +49 5691 82-99366
international@hewi.com
www.hewi.com

HEWI (UK) Limited
Holm Oak Barn, Beluncle Halt
Stoke Road
Hoo Kent ME3 9NT

Phone +44 1634 258 200
Fax +44 1634 250 099
info@hewi.co.uk
www.hewi.com