



Standard door fitting 130R01.330

in R-technology with roses according to DIN 18255 and EN 1906 made of polyamide, high-polished surface, consisting of:

Lever handle model 133R made of high-quality polyamide with corrosion resistant steel insert, solid colour, diameter 23 mm flattened face, with stepped shoulder guide and groove, easily installed by latching the lever handle into the base parts pre-mounted on the door.

The latching can be released using the dismantling tool. the lever handle meets the standards of DIN 18040.

Roses: model 305.23... and 306.23 roses substructure made of synthetic material-stainless steel composite, can be used for left and right-hand opening doors. Fixed rotating bearing of the lever handle with automatically latching all-round locking and 5 mm journal as maintenance-free plain bearing with elastic compensating area and second journal in the neck of the lever handle. Concealed, non-loosening screwed joint with M4 screw and sleeve combination as well as the pivot disappearing into the door leaf.

Rose cap, round, made of high-quality polyamide, solid colour, diameter 55 mm, 10.5 mm high, flat, 1.5 mm wall thickness.

Designed and tested for the projects segment, user category to EN 1906 - Class 4 fitting with spindle 8 - 8.5 mm

user category: Class 4

Durability: Class 7

Door weight: No classification specified

Fire resistance: Class 0

Safety: Class 1


Corrosion resistance: Class 4

Burglary protection: Class 0

Design-type: U

Dimensions in mm

Product is eliminated from 31st December 2020

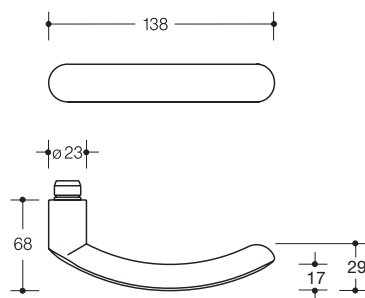

Colours

98	99	92	90	86	84
----	----	----	----	----	----

Polyamide

Technical information subject to alteration, 17th January 2020

HEWI Heinrich Wilke GmbH
Postfach 1260
D-34442 Bad Arolsen

Telefon: +49 5691 82-366
Telefax: +49 5691 82-99366
international@hewi.com
www.hewi.com

HEWI (UK) Limited
Holm Oak Barn, Beluncle Halt
Stoke Road
Hoo Kent ME3 9NT

Phone +44 1634 258 200
Fax +44 1634 250 099
info@hewi.co.uk
www.hewi.com