

Fire door fitting 250XCL11.130

Flat roses according to DIN 18255 and EN 1906 made of stainless steel, consisting of:

Lever handle 251X... made of stainless steel (1.4301), solid, diameter 21.3 mm, length 153.5 mm, width max. 28.2 mm, with stepped shoulder guide and groove, with set screw M5 as additional fixing of lever and spindle, for optimal transfer of force to door leaf.

Flat roses 305.21X... and 306.23X... made of stainless steel (1.4301), round, Diameter 52 mm, 3.0 mm high. Concealed, non-loosening connection: Fixed rotating bearing of the lever handle and the roses, and in the door leaf dipping support pin.

Mirror polished surface

Designed and tested for the projects segment, user category to EN 1906 - Class 4 fire door fitting with spindle 9 mm, according to DIN 18273

user category: Class 4

Durability: Class 7

Door weight: No classification specified

Fire resistance: Class B1

Safety: Class 0

Corrosion resistance: Class 4


Burglary protection: Class 0

Design-type: U



Dimensions in mm

Product is eliminated from 31st December 2020

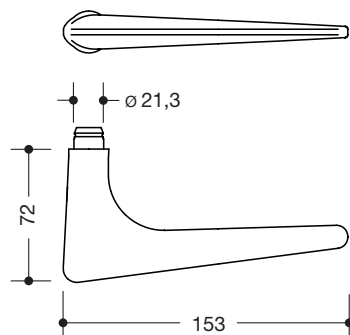

Surface

XC | mirror polished

The surface XC will be discontinued 31.12.2020

Alternative surface

XA | satin

Technical information subject to alteration, 17th February 2020

HEWI Heinrich Wilke GmbH
Postfach 1260
D-34442 Bad Arolsen

Telefon: +49 5691 82-366
Telefax: +49 5691 82-99366
international@hewi.com
www.hewi.com

HEWI (UK) Limited
Holm Oak Barn, Beluncle Halt
Stoke Road
Hoo Kent ME3 9NT

Phone +44 1634 258 200
Fax +44 1634 250 099
info@hewi.co.uk
www.hewi.com