



Available in DE, AT, FR, BE, PL, NL, LU

Shower thermostat AQ1.32T10040

- high-quality chrome-plated, round
- Fitting body, control and roses: brass
- Flow rate 12 l/min
- Anti-scalding protection: safety cutout at 38 °C
- Check valve in the wall connections
- dynamic flow controller 12 l/min in the shower outlet
- integrated dirt trap screens
- Standard shower outflow G 1/2 " for standard shower hoses
- hot-cold marking
- Connection type: S-connections with integrated silencers, push-on roses
- 60 mm high, 263 mm, projection 106 mm
- Actual dimension: 150 mm +/- 20 mm
- Noise class 1
- suitable for thermal disinfection according to DVGW W 551



Dimensions in mm

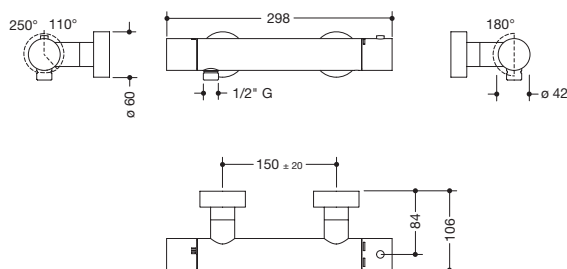

Surface fitting

chrome

Technical information subject to alteration, 23rd April 2020

HEWI Heinrich Wilke GmbH
Postfach 1260
D-34442 Bad Arolsen

Telefon: +49 5691 82-366
Telefax: +49 5691 82-99366
international@hewi.com
www.hewi.com

HEWI (UK) Limited
Holm Oak Barn, Beluncle Halt
Stoke Road
Hoo Kent ME3 9NT

Phone +44 1634 258 200
Fax +44 1634 250 099
info@hewi.co.uk
www.hewi.com