

Karta produktowa

Drażek antypaniczny zgodny z EN 1125 PS111XA30

HEWI



Drażek antypaniczny zgodny z EN 1125 PS111XA30

for equipping exit doors - approval to EN 1125 only in combination with tested locks - with CE marking.


Approved for fire and smoke doors, listing in the national technical approval test certificate of the respective door manufacturer in conjunction with DIN 18273, DIN 4102, DIN 1634, for single leaf or double doorsets in escape routes (inactive or inactive and active leaf)

Version for BKS-locks. Handle made of stainless steel, diameter 25 mm with tubular handle made of polyamide, diameter 30 mm. Handle tube positioned as one-sided handle, therefore clear visualisation of the optimum pressure point on the lock side, conforms to the requirements of DIN 18040. The stainless steel tubes are connected by a square bar - telescopic. Low projection depending on the operating angle of the lock follower, but at least in accordance with DIN 1125, grade 2: ≤ 100 mm.

Mounting distance 761 - 860 mm, 861 - 1010 mm, 1011 - 1160 mm, 1161 - 1300 mm, 1301 - 1440 mm and 1441 - 1580 mm. Variable mounting distance: shorter bar (fixing centres > 761 mm) at customer request, specify exact measurement. For use on timber and steel doors and metal frame doors, backset from 35 mm (depending on profile) as single or double doorset. Concealed, tamper-resistant screw fixing with threaded screws M5. Gear unit and the thrust bearing with cover, width of the rosette 32 mm, width of the transmission unit 52 mm, no jamming due to splayed surfaces of the gear unit cover on the lock side and positioning of the push-bar on the inside of the gear unit. Surface satin finished. Information on the classification of the panic bar according to EN 1125 can be found in the certificates of the respective lock manufacturer.



Wymiary w mm

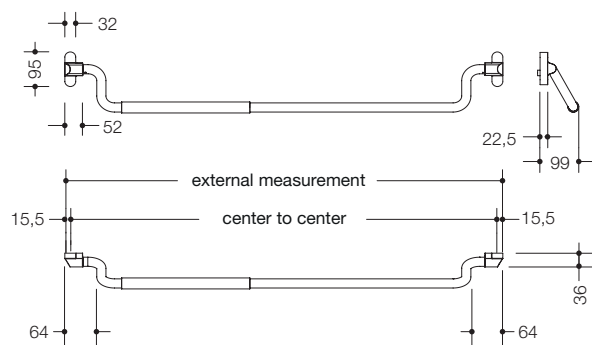

Powierzchnia / Kolory

XA powierzchnia szorstkowana	98	99	92	90	33	73
--------------------------------	----	----	----	----	----	----

Drażek antypaniczny Uchwyt

Alternatywna powierzchnia

XA powierzchnia szorstkowana	XA powierzchnia szorstkowana
--------------------------------	--------------------------------

Drażek antypaniczny Uchwyt

Zastrzega się możliwość wprowadzania zmian technicznych, 08.06.2020

HEWI Heinrich Wilke GmbH
Postfach 1260
D-34442 Bad Arolsen

Telefon: +49 5691 82-366
Telefax: +49 5691 82-99366
international@hewi.com
www.hewi.com

HEWI Heinrich Wilke GmbH
Sp. z o.o. Oddział w Polsce
Ul. Lelka 26
02-812 Warszawa

tel. +48 22 330 00 51
fax +48 22 330 00 50
info@hewi.pl
www.hewi.com