

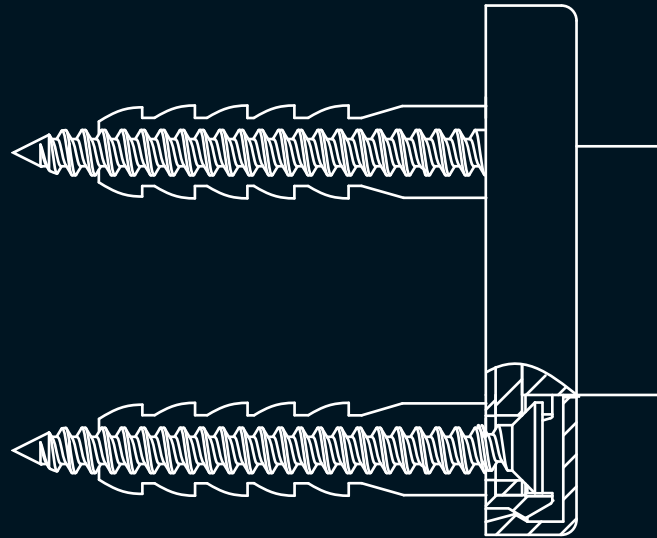
Fixings | Spare Parts Systems and Ranges

FIXINGS








Hinged/stationary supports rails	452 – 453
Hinged seats	452 – 453
Back rest rails	553 – 555
Rose fixing	455
Others	456

SPARE PARTS

Tumbler	458 – 459
Soap dishes	459
Soap dispenser	460 – 461
Shelves	462 – 463
Mirror, Waste bin	464 – 465
Toilet brush unit, toilet roll holder	466 – 469
Hinged support rails, hinged seats	470 – 471
Mounting aid, symbol set S 01	471
Shower head holder, curtain rings	472 – 473
Roses	474 – 475



Fixings







<p>Fixing type for:</p> <p>For fixing on walls made of:</p>	<p>stationary support and hinged support rails 801/805 Classic shower spray guards 801/805 Cl. hinged seats 950...</p>	<p>stationary support and hinged support rails 802 LifeSystem hinged seats 802 LifeSystem</p>	<p>stationary support and hinged support rails 950...</p>
 <p>concrete > C20/C25</p> <p>national technical approval number:: ETA-11/0493</p>	<p>BM17.2 New</p> <p>Supplied with 2 stainless steel screws 2 internal thread sleeves</p> <p>additionally injection mortar (HEWI order No.: 200311) or to be provided on site injection mortar HIT-HY200A (Hilti)</p>	<p>BM17.3 New</p> <p>Supplied with 3 stainless steel screws 3 stainless steel washers 3 internal thread sleeves</p> <p>additionally injection mortar (HEWI order No.: 200311) or to be provided on site injection mortar HIT-HY200A (Hilti)</p>	<p>BM17.4 New</p> <p>Supplied with 3 stainless steel screws 1 stainless steel washer 3 internal thread sleeves</p> <p>additionally injection mortar (HEWI order No.: 200311) or to be provided on site injection mortar HIT-HY200A (Hilti)</p>
 <p>concrete > C20/C25</p>	<p>BM10.2</p> <p>Supplied with 2 stainless steel screws 2 plugs</p>	<p>BM10.3</p> <p>Supplied with 3 stainless steel screws 3 stainless steel washers 3 plugs</p>	<p>BM10.4 New</p> <p>Supplied with 3 stainless steel screws 1 stainless steel washer 3 plugs</p>
 <p>autoclaved aerated concrete (> P2)</p>	<p>BM11.2</p> <p>Supplied with 2 stainless steel screws 2 anchor sleeves 2 mesh sleeves, ø 22 mm</p> <p>additionally injection mortar (HEWI order No.: 200266) Conical drill bit (HEWI order No.: 171041) or to be provided on site injection mortar HIT-HY 70 (Hilti) Conical drill bit TE-C PB 22/100 (Hilti)</p>	<p>BM11.3</p> <p>Supplied with 3 stainless steel screws 3 stainless steel washers 3 anchor sleeves 3 mesh sleeves, ø 22 mm</p> <p>additionally injection mortar (HEWI order No.: 200266) Conical drill bit (HEWI order No.: 171041) or to be provided on site injection mortar HIT-HY 70 (Hilti) Conical drill bit TE-C PB 22/100 (Hilti)</p>	<p>BM11.4 New</p> <p>Supplied with 3 stainless steel screws 1 stainless steel washer 3 anchor sleeves 3 mesh sleeves, ø 22 mm</p> <p>additionally injection mortar (HEWI order No.: 200266) Conical drill bit (HEWI order No.: 171041) or to be provided on site injection mortar HIT-HY 70 (Hilti) Conical drill bit TE-C PB 22/100 (Hilti)</p>
 <p>lightweight walls with rear lining made of laminated timber boards (with waterproof bonding, at least 30 mm thick required, e.g. studs or prewall installation)</p>	<p>BM12.2</p> <p>Supplied with 2 stainless steel screws</p>	<p>BM12.3</p> <p>Supplied with 3 stainless steel screws 3 stainless steel washers</p>	<p>BM12.4 New</p> <p>Supplied with 3 stainless steel screws 1 stainless steel washer</p>
 <p>lightweight walls with integrated steel plates (e.g. studs or pre wall installation)</p>	<p>BM13.2</p> <p>Supplied with 2 stainless steel screws</p>	<p>BM13.3</p> <p>Supplied with 3 stainless steel screws 3 stainless steel washers</p>	<p>BM13.4 New</p> <p>Supplied with 3 stainless steel screws 1 stainless steel washer</p>
 <p>with mesh sleeve ø 18 mm</p> <ul style="list-style-type: none"> · hollow concrete block · vertically perforated bricks · hollow lightweight concrete block · lightweight aggregate concrete with open structure <p>national technical approval number: Z-21.3-1830</p>  <p>without mesh sleeve</p> <ul style="list-style-type: none"> · solid bricks · perforated calcium silicate block <p>national technical approval number: Z-21.3-1830</p>	<p>BM18.2 New</p> <p>Supplied with 2 stainless steel screws 2 anchor sleeves 2 mesh sleeves, ø 18 mm</p> <p>additionally injection mortar (HEWI order No.: 200266) or to be provided on site injection mortar HIT-HY 70 (Hilti)</p>	<p>BM18.3 New</p> <p>Supplied with 3 stainless steel screws 3 stainless steel washers 3 anchor sleeves 3 mesh sleeves, ø 18 mm</p> <p>additionally injection mortar (HEWI order No.: 200266) or to be provided on site injection mortar HIT-HY 70 (Hilti)</p>	<p>BM18.4 New</p> <p>Supplied with 3 stainless steel screws 1 stainless steel washer 3 anchor sleeves 3 mesh sleeves, ø 18 mm</p> <p>additionally injection mortar (HEWI order No.: 200266) or to be provided on site injection mortar HIT-HY 70 (Hilti)</p>

<p>mobile hinged support rails 950...</p>	<p>cover kit with fixing for: stationary/hinged supports rails 801/805 Classic Shower spray guard 801/805 Cl.</p>	<p>cover kit with fixing for: stationary support and hinged supports rails 950.../802 LifeSystem</p>	<p>hinged seats 801</p>	<p>backrest rails with rose fixings 802 LifeSystem</p>
<p>BM17.3M New</p> <p>Supplied with 3 stainless steel screws 3 internal thread sleeves</p> <p>additionally injection mortar (HEWI order No.: 200311) or to be provided on site injection mortar HIT-HY200A (Hilti)</p>			<p>BM27.4 New</p> <p>Supplied with 4 stainless steel screws 4 internal thread sleeves</p> <p>additionally injection mortar (HEWI order No.: 200311) or to be provided on site injection mortar HIT-HY200A (Hilti)</p>	
			<p>BM20.4</p> <p>Supplied with 4 stainless steel screws 4 plugs</p>	<p>BM40.6</p> <p>Supplied with 2 stainless steel screws 2 stainless steel washers 2 plugs</p>
<p>BM11.3M</p> <p>Supplied with 3 stainless steel screws 3 anchor sleeves 3 mesh sleeves, ø 22 mm</p> <p>additionally injection mortar (HEWI order No.: 200266) Conical drill bit (HEWI order No.: 171041) or to be provided on site injection mortar HIT-HY 70 (Hilti) Conical drill bit TE-C PB 22/100 (Hilti)</p>	<p>36359</p> <p>Supplied with* 2 stainless steel screws 2 anchor sleeves 2 mesh sleeves, ø 22 mm 2 caps 2 bases</p> <p>additionally injection mortar (HEWI order No.: 200266) Conical drill bit (HEWI order No.: 171041) or to be provided on site injection mortar HIT-HY 70 (Hilti) Conical drill bit TE-C PB 22/100 (Hilti)</p>	<p>62323 New</p> <p>Supplied with** 3 stainless steel screws 3 stainless steel washers 3 anchor sleeves 3 mesh sleeves, ø 22 mm 3 caps 3 bases</p> <p>additionally injection mortar (HEWI order No.: 200266) Conical drill bit (HEWI Nr.: 171041) or to be provided on site injection mortar HIT-HY 70 (Hilti) Conical drill bit TE-C PB 22/100 (Hilti)</p>	<p>BM21.4</p> <p>Supplied with 4 stainless steel screws 4 anchor sleeves 4 mesh sleeves, ø 22 mm</p> <p>additionally injection mortar (HEWI order No.: 200266) Conical drill bit (HEWI order No.: 171041) or to be provided on site injection mortar HIT-HY 70 (Hilti) Conical drill bit TE-C PB 22/100 (Hilti)</p>	<p>BM41.6</p> <p>Supplied with 2 stainless steel screws 2 stainless steel washers 2 anchor sleeves 2 mesh sleeves, ø 22 mm</p> <p>additionally injection mortar (HEWI order No.: 200266) Conical drill bit (HEWI order No.: 171041) or to be provided on site injection mortar HIT-HY 70 (Hilti) Konusbohr. TE-C PB 22/100 (Hilti)</p>
<p>BM12.3M</p> <p>Supplied with 3 stainless steel screws</p>	<p>36358</p> <p>Supplied with * 2 stainless steel screws 2 stainless steel Rampa sleeves 2 caps 2 bases</p>	<p>62322</p> <p>Supplied with ** 3 stainless steel screws 3 stainless steel Rampa sleeves 3 caps 3 bases</p>	<p>BM22.4</p> <p>Supplied with 4 stainless steel screws</p>	<p>BM42.6</p> <p>Supplied with 2 stainless steel screws 2 stainless steel washers</p>
	<p>36357</p> <p>Supplied with* 2 stainless steel screws 2 caps 2 bases</p>	<p>62321</p> <p>Supplied with** 3 stainless steel screws 3 caps 3 bases</p>	<p>BM23.4</p> <p>Supplied with 4 stainless steel screws</p>	
<p>BM18.3M New</p> <p>Supplied with 3 stainless steel screws 3 anchor sleeves 3 mesh sleeves, ø 18 mm</p> <p>additionally injection mortar (HEWI order No.: 200266) or to be provided on site injection mortar HIT-HY 70 (Hilti)</p>	<p>63055 New</p> <p>Supplied with * 2 stainless steel screws 2 anchor sleeves 2 mesh sleeves, ø 18 mm 2 caps 2 bases</p> <p>additionally injection mortar (HEWI order No.: 200266) or to be provided on site injection mortar HIT-HY 70 (Hilti)</p>	<p>63056 New</p> <p>Supplied with ** 3 stainless steel screws 3 stainless steel washers 3 anchor sleeves 3 mesh sleeves, ø 18 mm 3 caps 3 bases</p> <p>additionally injection mortar (HEWI order No.: 200266) or to be provided on site injection mortar HIT-HY 70 (Hilti)</p>	<p>BM28.4 New</p> <p>Supplied with 4 stainless steel screws 4 anchor sleeves 4 mesh sleeves, ø 18 mm</p> <p>additionally injection mortar (HEWI order No.: 200266) or to be provided on site injection mortar HIT-HY 70 (Hilti)</p>	<p>BM48.6 New</p> <p>Supplied with 2 stainless steel screws 2 stainless steel washers 2 anchor sleeves 2 mesh sleeves, ø 18 mm</p> <p>additionally injection mortar (HEWI order No.: 200266) or to be provided on site injection mortar HIT-HY 70 (Hilti)</p>

* 2 caps made of high-quality polyamide in HEWI colour 99 (pure white)
2 bases made of high-quality black polyamide


** 3 caps made of high-quality polyamide in HEWI colours 99 (pure white), 98 (signal white) or 92 (anthracite grey)
3 bases made of high-quality black polyamide

Fixings

Fixing type for:	backrest rails 801/805 Classic
<p>For fixing on walls made of:</p>  <p>concrete > C20/C25</p>	<p>BM10.2.1</p> <p>for fixing on Range 801 / 805 Classic stationary support rails and hinged support rails with fixing BM10.2 on walls made of concrete</p> <p>Supplied with</p> <ul style="list-style-type: none"> 2 stainless steel screws 2 centring sleeves 2 plugs <p>Please note:</p> <p>Scope of delivery includes only fixing material for back rest rail. Fixing material for hinged support rail is to be ordered separately.</p>
 <p>with mesh sleeve ø 18 mm</p> <ul style="list-style-type: none"> · hollow concrete block · vertically perforated bricks · hollow lightweight concrete block · lightweight aggregate concrete with open structure  <p>without mesh sleeve</p> <ul style="list-style-type: none"> · solid bricks · perforated calcium silicate block  <p>with mesh sleeve ø 22 mm</p> <ul style="list-style-type: none"> · autoclaved aerated concrete (>P2) 	<p>BM11.2.1</p> <p>for fixing on Range 801 / 805 Classic stationary support rails and hinged support rails with fixing BM11.2, BM17.2, BM18.2 on walls made of concrete</p> <p>Supplied with</p> <ul style="list-style-type: none"> 2 stainless steel screws 2 centring sleeves <p>Please note:</p> <p>Scope of delivery includes only fixing material for back rest rail. Fixing material for hinged support rail is to be ordered separately.</p>
 <p>lightweight walls with rear lining made of laminated timber boards (with waterproof bonding, at least 30 mm thick required, e.g. studs or prewall installation)</p>	<p>BM12.2.1</p> <p>for fixing on Range 801 / 805 Classic stationary support rails and hinged support rails with fixing BM12.2 on walls made of concrete</p> <p>Supplied with</p> <ul style="list-style-type: none"> 2 stainless steel screws 2 centring sleeves <p>Please note:</p> <p>Scope of delivery includes only fixing material for back rest rail. Fixing material for hinged support rail is to be ordered separately.</p>
 <p>lightweight walls with integrated steel plates (e.g. studs or pre wall installation)</p>	<p>BM13.2.1</p> <p>for fixing on stationary support rails and hinged support rails 801/805 Classic with fixing BM13.2</p> <p>Supplied with</p> <ul style="list-style-type: none"> 2 stainless steel screws 2 centring sleeves <p>Please note:</p> <p>Scope of delivery includes only fixing material for back rest rail. Fixing material for hinged support rail is to be ordered separately.</p>

Item Number

Dimensions in mm / Specification



BM30.2

HEWI Fixing materials for backrest rails 802 LifeSystem

· For fixing on the bearing block of the Range 802 LifeSystem hinged support rails

Supplied with

2 stainless steel screws
2 stainless steel washers
2 stainless locknuts

171041

Hilti TE-C PB 22/100 aerated concrete drill/undercut drill

· for supplementing the fixing on walls made of autoclaved aerated concrete (> P2)
· for supplementing the fixing of stationary support rails and hinged support rails, hinged seats, shower spray guards and backrest rails
· to be provided for the HEWI fixing materials BM11.2, BM 11.3, BM11.3M, BM21.4, BM41.6, 36359, 62323
· for all standard, commercially available professional hammer drills (e.g. Hilti TE 6) with TE-C chuck
· drillhole diameter 22 mm, working length 100 mm

200266


Hilti HIT-HY 70 injection mortar in foil cartridge

· for adding the fixing on walls made of:
National technical approval number: Z-21.3-1830
· solid bricks, perforated calcium silicate block, hollow concrete block, vertically perforated bricks, hollow lightweight concrete block, lightweight aggregate concrete with open structure
Without technical approval
· autoclaved aerated concrete (>P2)
· for supplementing the fixing of stationary support rails and hinged support rails, hinged seats, shower spray guards and backrest rails
· to be provided for the HEWI fixing materials BM11.2, BM11.3, BM11.3M, BM18.2, BM18.3, BM18.3M, BM21.4, BM28.4, BM41.6, BM48.6, 36359, 62323, 63055, 63056
· incl. 2 perforated block mixers
· volume: 330 ml

200311

Hilti HIT-HY 200A injection mortar in foil cartridge

· for supplementing the fixing on walls made of concrete (> C20/C25)
National technical approval number: ETA-11/0493
· for supplementing the fixing of stationary support and hinged support rails, hinged seats and shower spray guards
· to be provided for the HEWI fixing materials BM17.2, BM17.3, BM17.4, BM17.3M, BM27.4
· incl. 2 perforated block mixers
· volume: 330 ml



BM210

HEWI fixing materials

· rose fixing for wall mounting

**Rail system 801/805 Classic
Curtain rails 801/805 Classic
Curtain rails and ceiling support 802 LifeSystem
Scope of delivery per rose**

2 stainless steel screws
2 plugs

BM211

**Rail system 801/805 Classic
Scope of delivery per rose**

3 stainless steel screws
3 plugs

BM214

**Ceiling supports 801/805 Classic/800 K
Scope of delivery per rose**

2 stainless steel screws
2 plugs
1 stud bolt

For installation on lightweight walls you will need a rear lining, e.g. laminated timber boards, with waterproof bonding >20 mm thick.

Item Number

Dimensions in mm / Specification



BM1211

HEWI Fixing kit for bath towel rail 477.30... u. and grab bar 477.31... without roses

- retro-fit of bath towel rails and grab bars diameter = 28 mm mounting with roses
- roses \varnothing 60 mm
- incl. HEWI fixing materials
- made of high-quality polyamide

Please advise colour when ordering.

BM1220

Fixing materials for toilet roll holder 162.21.100... and 162.21.200...

Supplied with


- 2 stainless steel Spax Countersunk 4 x 45
- 2 plugs
- 1 mounting base for toilet roll holder

BM1221

Fixing materials for single hook and spare roll holder 162.90.010... and 162.21.300...

Supplied with

- 1 stainless steel Spax Countersunk 4 x 45
- 1 plugs
- 1 mounting base for toilet spare paper holder



BM1263.2

Fixing materials for rail system 950... and Serie 802 LifeSystem and for System 800 K curtain rails

- For rose fixings on the wall

Supplied with for 2 rose fixings

- 2 stainless steel wall plates
- 6 stainless steel screws HR 5 x 60
- 6 plugs

For installation on lightweight walls you will need a rear lining, e.g. laminated timber boards, with waterproof bonding >20 mm thick.



63086

HEWI Cover rose

- used to cover the HEWI fixing BM1263.2 of Ranges 802, 800 K and rail systems 950...
- round cover rose, \varnothing 80 mm, 13 mm high
- made of high-quality polyamide in HEWI colour 98 (signal white)

New 63157

do., high-quality chrome-plated

