

### Window handle 180XAFGA.5K

lockable, for windows with tilt-first function, Design 185X made of stainless steel (1.4301), 25 mm wide, 135 mm long, with 90 degree latching points and 7 mm square spindle, length protrudes by 30 mm (other lengths and 45 degree latching on request). Preassembled on a rose with metal base, 75 x 33 mm, with pivot diameter 10 mm, concealed screw fixing, screw hole spacing 43 mm, cover cap made of stainless steel (1.4301), wall thickness 1.5 mm. Integrated lock cylinder with 5 pin tumblers, lockable in all latched positions, however, release of a 90 degree rotational movement, for opening the window when the window handle is locked, the locking acts directly on the handle and blocks rotation of the handle.

keyed to differ:


every lock cylinder requires a separate key, 2 keys are supplied with each handle.

keyed alike:

all lock cylinders can be locked with the same key.

Surface of the window handle and rose with satin finish

### Dimensions in mm

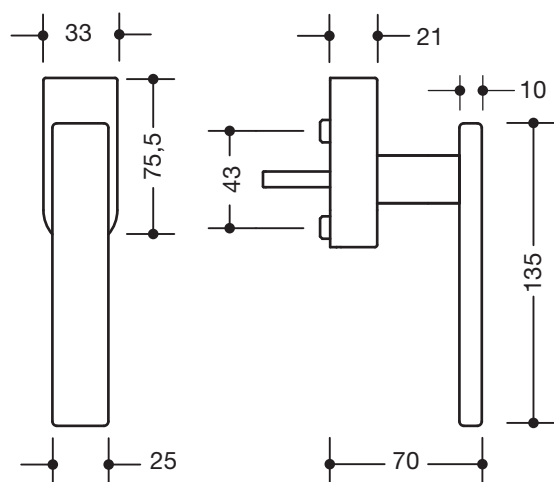

Surface

XA|satin

Technical information subject to alteration, 23rd August 2019

HEWI Heinrich Wilke GmbH  
Postfach 1260  
D-34442 Bad Arolsen

Telefon: +49 5691 82-366  
Telefax: +49 5691 82-99366  
international@hewi.com  
www.hewi.com

HEWI (UK) Limited  
Holm Oak Barn, Beluncle Halt  
Stoke Road  
Hoo Kent ME3 9NT

Phone +44 1634 258 200  
Fax +44 1634 250 099  
info@hewi.co.uk  
www.hewi.com